



CALIFORNIA AIR TOOLS 80060C Powerful 6.0 Hp Ultra Quiet & Oil-Free 80 Gallon Stationary Air Compressor



6.0 HP (Rated/Running)

80 Gallon ASME Certified Steel Air Tank with Automatic Drain Valve

20.00 CFM @ 40 PSI

16.80 CFM @ 90 PSI

220 Volts / 60 Hertz / Single Phase


(Range 200-240v)

The CALIFORNIA AIR TOOLS 80060C Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 6.0 Hp air compressors in the industry having only 76 decibels of sound.


76 Decibels

6.0 HP Oil-Free
20.0 CFM @ 40 PSI
16.80 CFM @ 90 PSI
220V 60hz 1-Phase
(range 200v-240v)

80
Gallon
Steel
ASME
Air
Tank

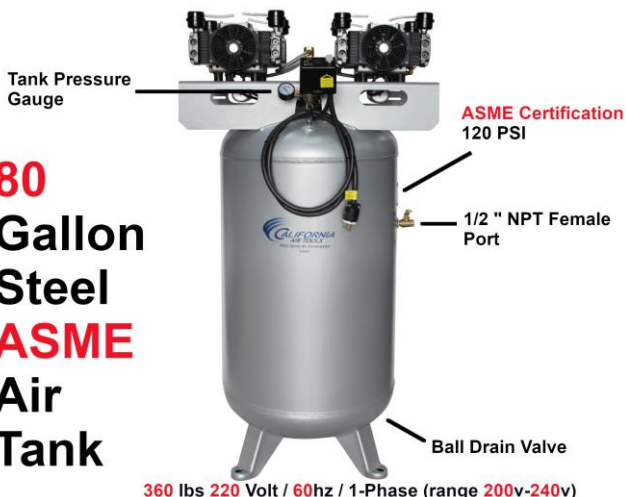

The Powerful Twin OLF2800 3.0 Hp motors operates at only 1680 RPM creating less noise and less wear. The Oil-Free OLF motor/pump system is engineered for high performance and durability. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

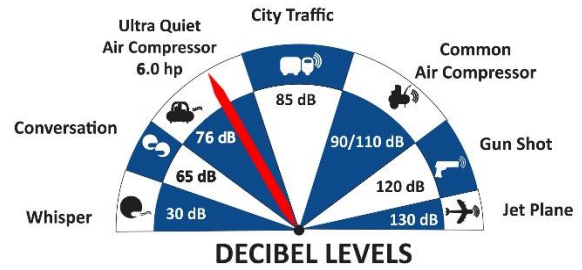

ULTRA QUIET

ONLY 76 DB NOISE LEVEL


The large 80 Gallon Steel ASME Air Tank is ideal for large shops and garages.

The Oil-Free Quad Piston Pump System is engineered for high performance and durability.

Designed for the person looking for Power, Oil-Free Air Flow and at Least 30% Less Noise!

ASME CERTIFIED TANK

The large 80 Gallon ASME Steel Air Tank is just the right size to support a large facility including: commercial business, manufacturing operations, autobody shops and other general pneumatics that require air volumes of up to 20 cfm.

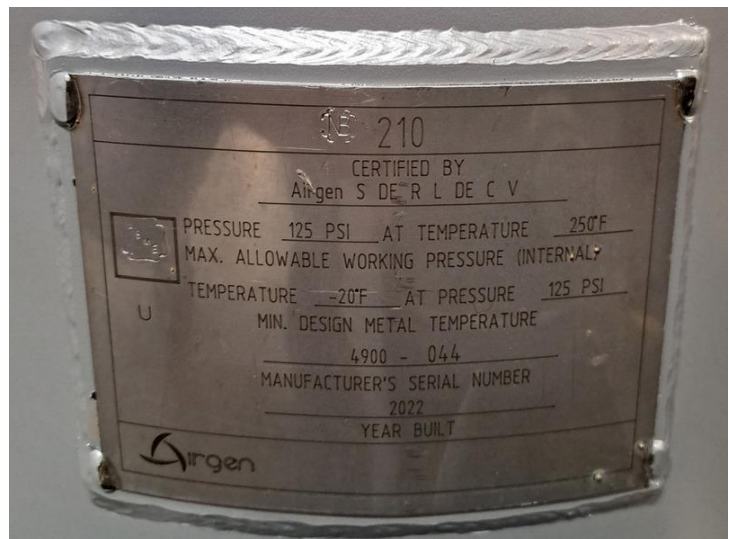



FEATURES

- * **Ultra Quiet** - Only **76 decibels**
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Main tank pressure gauge
- * Female air output port with ball valve (1/2" NPT)
No output pressure regulator, quick connector or air hose included.
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 120 PSI Maximum Pressure
- * 220 Volt / 60 Hertz / Single Phase - (200-240v range)
- * Amp Draw - 24 Amps
- * Time to fill tank from empty to full - 3:56 Minutes
- * Recovery time from 90 PSI to 120 PSI - 57 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 80 Gal. Steel ASME Air Tank
- * L (23.5") x W/D (21.0") x H (66")
- * 360 lbs
- * Comes complete (8) Air Filters and (8) Air In-Take Tube
- * Plug Type: Nema L6-30P (fits Nema L6-30P outlet /r receptacle)
- * Power Cord Length: 7ft
- * ASME Certified for Commercial Use
- * 1 Year Limited Warranty
- * Commercial Use: Refer to State & City Codes
- * Assembled in Mexico with global components

For more information and to watch a 80060C product demonstration please visit California Air Tools:
<https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/6-0-hp-air-compressor/cat-80060c/>

Manufactured in Mexico using global components.
MODEL: 80060C
PART NUMBER: CAT-80060C
www.californiaairtools.com
Revision A: 09-2024